
Physical Properties of JK Super OPC 53 G Cement

SI. No.	Name of Test	Unit	Requirement as per IS : 269 -2015	Test Results
1	Fineness	m²/Kg	Min. 225	310
2	Soundness			
a	Le - Chatelier	mm	Max. 10	1
b	Autoclave Expansion	%	Max. 0.8	0.035
3	Setting Time			
a	Initial Setting Time (IST)	Minutes	Min. 30	135
b	Final Setting Time (FST)		Max. 600	180
4	Compressive Strength			
a	3 Days	(MPa)	27	36
b	7 Days		37	47
С	28 Days		53	61



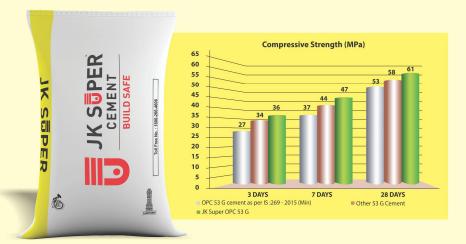

Contact

Technical Services and Marketing Services
Padam Tower, 19 DDA Community Centre, Okhla Phase -1, New Delhi -110020
Tel: (+91) 11-49220000, fax (+91) 11-49220044

Email For CTS: ctsgrey.delhi@jkcement.com

Help line- 18001028868 www.jkcement.com

Printed 06/2019





- JK Cement is an affiliate of the multi-disciplinary industrial conglomerate, JK Organisation
- One of the leading Grey Cement manufacturers with over four decades of experience in cement manufacturing
- Annual combined cement production capacity of 10.5 MTPA
- First international foray with the setting up of a green-field dual process White-cum-Grey Cement plant at Fujairah, U.A.E
- Market presence across Rajasthan, Madhya Pradesh, Gujarat, Uttar Pradesh, Uttarakhand, Haryana, Punjab and Jammu & Kashmir and South India
- 2nd largest manufacturer of White Cement and Wall Putty in India and 3rd largest manufacturer of White Cement in the world



- Ordinary Portland Cement conforming to IS:269-2015
- Produced with best quality limestone in India
- Superior initial and ultimate strength and extra fineness
- Consistent quality surpasses all national and international standards



Salient Features of JK Super **OPC 53 Grade Cement**

- Higher Initial Compressive Strength: Speeds up construction activities, advantageous product for precast applications
- Higher Ultimate Compressive Strength: Easy to make higher grade concrete M80 and above, with optimum cement content
- Higher Fineness: Quicker hydration reaction and higher strength
- > Lower Permeability: Optimum Particle Size Distribution (PSD) to produce
- > Low Chloride Content: Increased corrosion resistance

- compact and dense concrete
- Low Sodium Potassium Ratio: Reduced chances of Alkali Aggregate

CUSTOMER SERVICES

Precast Concrete and RCC Elements

Pre-Stressed and Post Tensioned

Heavy Load Structures like Bridges

Concrete

Flyovers etc.

Industrial Flooring

High Rise Buildings

Instant Plugging Mortars

Specific Concrete Repair Works

Cement Grouts

Type of Services

Concrete testing at JK Concrete Innovation and Application Centre (CIAC)

Free Concrete Mix Design

Sand, Coarse Aggregates and Water Testing

NDT / Rebound Hammer test

Admixture Compatibility Test

Quality of Service

Uphold our brand promise of 'Build Safe' Toll Free Contact Number **Prompt Services**

Experienced Engineers Customized Solutions

Technology & Quality Assurance

- All cement manufacturing units of JK Cement Ltd. are ISO 9001:2015 (QMS), ISO 14001:2015 (EMS), OHSAS 18001:2017 & ISO 50001:2011certified by LRQA
- Manufacturing units use the technical expertise of Denmark based cement giant FLSmidth & Co.
- Latest technology process control including Gama Matrix Analyser, Robo Lab, Automatic Blaine Analyser which ensures consistent quality
- QCX and QXRD: Quality Control by Computer, X-Ray Analyser and X-Ray Diffractometer to automatically control the quality of raw mix composition and clinker
- All operations are controlled by Fuzzy Logic System to ensure consistent and best quality
- Use of roller press in production ensures optimum PSD of
- For increased rate of strength gain, higher Blaine maintained at 300+ m2/Kg while IS requirement is of 225 m2/Kg



Particle Size Analyser

Auto Sampling Unit

Benefits of JK Super OPC 53 Grade Cement

- Economical
- Superior quality and higher strength
- . Better soundness and low chloride content for enhanced performance of concrete
- Concrete structures made with JK Super OPC 53 grade
- cement have proven to be more durable and safer due to lower permeability of concrete
- Compatible with almost all branded construction chemicals (Chemical Admixtures)
- Reliable and prompt technical services

Guidelines on Handling of OPC 53 Grade Cement for Concrete Production

Usage of JK Super OPC 53 Grade Cement

Point of Concern	Handling Precautions	
Initial shrinkage cracks in concrete	To mitigate chances of initial shrinkage cracks 1. Ensure the initial curing as early as possible 2. Covering of freshly finished concrete with plastic sheet is a good option 3. Use shrinkage compensating admixtures 4. Use wind barrier to prevent early evaporation of water from concrete surface	
Concrete application during hot weather conditions	1. Try to do the concrete work early morning or late evening 2. Store the raw materials in shade 3. Cool down the aggregates by sprinkling of water 4. Use cold water or add ice to bring down the temperature of concrete 5. Shuttering / reinforcement can also be cooled down by sprinkling of water before placing of concrete	
Concrete application in thick or mass concrete elements/structure	Place and compact the concrete in layers Use temperature controlled or chilled concrete Try to design the concrete with optimum quantity of cement If possible or permitted, use supplementary cementitious materials in concrete mix	
Transportation of concrete to long distances or for a time period of more than 1.5 hours	1. Design the concrete mix for longer retention 2. Use high water reducing admixtures like PCE (Poly Carboxylate Ether) admixtures for high grade concretes 3. Design the concrete mix with safe provision/margin of admixture dosage for redosing of concrete with admixture at site, if required	

